

ett.com



OFF-ROAD LOWBED TRAILERS

SPECIALISED SUPPORT EQUIPMENT



ETT LOWBED TRAILER

When it comes to moving heavy machinery, ETT Lowbed Trailers are the fastest, most versatile machines available. With a turnaround time as low as four minutes, transporting equipment is safe and fast.

Engineered from the ground up, ETT Lowbed Trailers make use of high quality components and superior manufacturing techniques to ensure seamless performance in the toughest conditions.

Our lowbed capacities range from 40 Tonne up to 360 Tonne, with the ability to carry anything from dozers and excavators, to large shovels and drill rigs.



LOADING

Designed to load from the rear. The deck is lowered to form a ramp with a 4.5 degree incline. The loading process is remote controlled, thus the operator remains safe.




ISO 3450 BRAKING

The fully integrated brake management system ensures safe travel on inclines and slopes. The braking system is engineered and certified to ISO 3450.



SUB FRAME AND BALL HITCH

All lowbeds connect to the haul truck via our extremely durable, zero maintenance heavy duty ball hitch. The sub frame connects to the truck body through heavy duty pins.

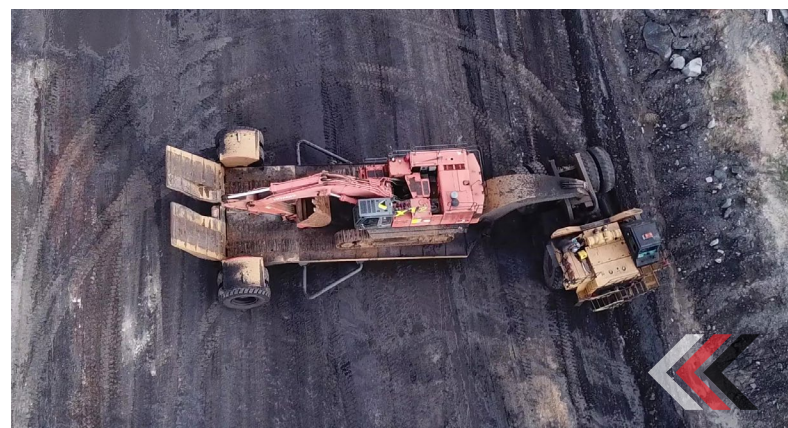

SINGLE AXLE DESIGN

ETT Lowbed Trailers feature a single axle design. This simplified design is cost effective, with minimal tyre scuffing and road damage during a U-turn.



◀◀ TELEMETRY

A performance monitoring system is fitted as standard. This monitors the following: Brake temperature, Brake pressures, Brake cooling, System temperature, Brake cooling system pressure, Payload, Traveling speed, Data logging, Quick reports, Integrated warnings and operator prompts.

◀◀ DECK SURFACE

ETT lowbed deck surfaces are supplied as standard in the following configurations:

- Size 40mT – 60mT – steel deck with heavy duty grouser pattern to ensure engagement with track grousers on tracked machines
- Size 80mT and larger– steel pockets on the deck filled with G5 grade gravel. This gravel bed is a proven and maintenance free design innovation that offers an ultra stable platform for holding tracked machines. The gravel lining on the deck ensures a stable key between the lowbed deck and the grousers of the machine being carried.
- Optional Railway Sleeper Wood Deck – Railway sleeper material located by heavy duty steel retainers. The sleeper deck can be installed. A quotation can be provided on request.





LOWBED CAPACITIES

ETT Off-Road Lowbed Trailer capacities range from 40 Tonnes up to 360 Tonnes. Our lowbed models cater for a wide range of mining equipment, from bulldozers and excavators to large face shovels and drill rigs.

20+

years' service
in the harshest
environments



ETT maintains a complete inventory of repair and maintenance parts for all of our products to include accessory kits and service parts packages. Our professionally trained team of engineers and support staff are focused on ensuring your asset's optimal performance and ultimately your satisfaction with ETT products.

Under our policy of continuous improvement, we reserve the right to change technical data and design without prior notice. Photographs featured in this brochure may include optional equipment.

CONTACT US

www.ett.com




ISO
ACCREDITED



ON-SITE
ASSEMBLY



SERVICE



SPARES



ACCESSORIES



QUALITY

